



e-Xstream engineering | SOFTWARE BROCHURE

Digimat

The material modeling platform



Digmat

e-Xstream engineering develops Digmat, a state-of-the-art multi-scale material modeling technology that helps speed up the development processes for plastic & composite materials and structures.

Digmat is used by CAE engineers, specialists in manufacturing processes of composite materials, and materials scientists to accurately predict the nonlinear micromechanical behavior of complex multi-phase composite materials and structures.

Digmat, the award-winning software, is relied upon by major Material Suppliers, Tier1s and OEMS worldwide in various industries. It bridges the gap between manufacturing and structural performance. It helps multi-industries using plastics & composites.

Digmat's applications follow three major strategies:

Material Engineering and Virtual Testing

The purpose of material engineering is to take a simulation approach for the identification of promising candidates for new composite materials thereby reducing the amount of experiments needed. This helps to save money and to reduce the time needed to develop new materials.

In research the approach allows to gain insight into and to understand mechanisms that dominate the macroscopic material properties but actually arise from its microscopic composition.

Process Simulation

Digmat provides process simulation solutions for the additive manufacturing of polymers. It helps process engineers to anticipate manufacturing issues and optimize part quality (ex: minimize warpage and residual stresses) by predicting the relative influence of the various process parameters.

Structural Engineering

The purpose of structural engineering is to design full composite parts. The focus is on the part performance as it depends on the material characteristics and the manufacturing method and conditions that were used for the individual design.

Key to this challenge is a material model that correlates to experimental behavior as closely as possible. For this purpose a reverse engineering procedure is used that results in the parametrization of micro-mechanical models and their adaption to a set of anisotropic material measurements to meet the global composite performance best possible.

Such material models can now read locally different micro-structure information from various sources and convert them into a local material property. A fully coupled analysis results in a simulation model with individual material properties described for each integration point in the Finite Element analysis. Coupled analyses are state-of-the art for the modeling of composite parts and have proven to match experimental observation perfectly on many occasions.

The material modeling platform

e-Xstream's team help engineers, managers and corporations optimize and improve their engineering processes by developing, implementing and customizing tools and solutions as well as consulting on critical projects:

- **Tools**

A complete set of complementary interoperable software products focused on expert usage for material and/or structural engineering.


- **Solutions**

Easy, process-centric, and user-friendly usage of Digimat technology from a fully integrated GUI guided environments for specific tasks (e.g. running coupled analyses for short fiber reinforced plastic parts with Digimat-RP).


- **eXpertise**

Knowledge transfer from 15+ years of experience in micromechanical modeling. It includes a Digimat Users' Manual, as well as access to e-Xstream offers for services, support and trainings. Digimat,

Award-Winning e-Xstream Engineering

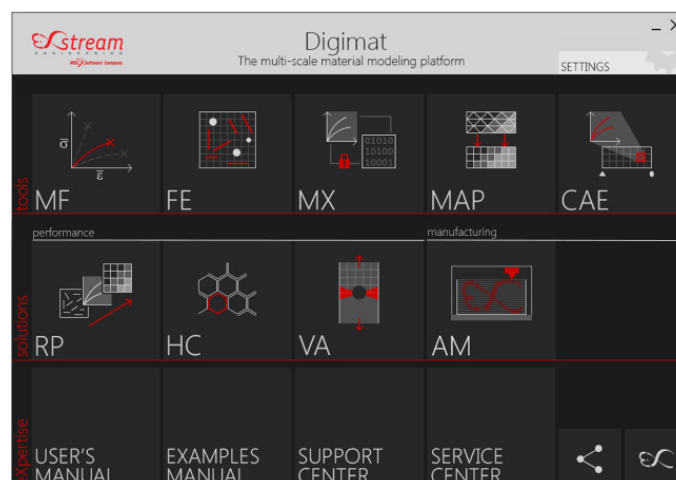

The Digimat platform



MF

Digmat-MF

Digmat-MF is a mean-field homogenization tool used to rapidly compute the macroscopic performance of composite materials based on their per-phase properties and microstructure definition.

Digmat-MF aims at realistically predicting the nonlinear constitutive behavior of multi-phase materials taking into account temperature and strain rate dependencies. The composite morphology such as filler content, length, aspect ratio and orientation take full impact on the resulting composite behavior.

The technology is especially well suited for describing fiber reinforced composites:

- Short fiber reinforced plastics
- Long fiber thermoplastics
- Unidirectional composites
- Woven composites

A broad range of performances can realistically be predicted:

- Stiffness
- Failure
- Creep
- Fatigue
- Conductivity (thermal & electrical)

Main Capabilities

Nonlinear (per-phase) Material Models

- Linear (Thermo) Elasticity: Isotropic / Transversely isotropic / Orthotropic / Anisotropic
- Linear Viscoelasticity
- (Thermo) Elastoplasticity:
 - J2 Plasticity and Isotropic hardening
 - Power / Exponential / Exponential linear laws: Kinematic hardening (linear with restoration)
- For cyclic elastoplasticity: Drucker-Prager
- Elastoplasticity with Damage:
 - Lemaître-Chaboche
- (Thermo) Elasto-Viscoplasticity:
 - Norton / Power / Prandtl laws / Time law
- Viscoelasticity-Viscoplasticity
- Hyperelasticity (finite strain):
 - Neo-Hookean / Mooney-Rivlin / Ogden / Swanson / Storakers (compressible foams)
- Elasto-viscoplasticity (finite strain):
 - Leonov-EGP
- Thermal & electrical conductivity: Ohm & Fourier

Microstructure Morphology

- Multiple reinforcement phases
- Multi-layer microstructure
- Ellipsoidal reinforcements (fillers, fibers, platelets)
- Aspect ratio distribution
- General orientation (fixed, random, 2nd order orientation tensor)
- Void inclusions
- Coated inclusions with relative or absolute thickness
- Deformable, quasi-rigid or rigid inclusions
- Clustering

Homogenization Methods

- Mori-Tanaka
- Interpolative double inclusion
- 1st and 2nd order homogenization schemes
- Multi-step, multi-level homogenization methods

Failure Indicators

- Applied at micro and/or macro scale, or on pseudo-grains using the FPGF model (First Pseudo-Grain Failure model), including multilayer failure controls
- Failure models: Maximum stress and strain, Tsai-Hill 2D, 3D & 3D Transversely Isotropic, Azzi-Tsai-Hill 2D, Tsai-Wu 2D, 3D & 3D Transversely Isotropic, Hashin-Rotem 2D, Hashin 2D & 3D, SIFT, Christensen, User-defined
- Strain rate dependent failure criteria
- Failure criteria on Leonov-EGP & hyperelastic material models

Progressive Failure

- Failure: Hashin 2D / Hashin 3D / Hashin-Rotem 2D/ Multicomponent 2D
- Damage: Matzenmiller / Lubliner / Taylor (MLT) / Individual damage evolution functions
- Stabilization control using viscous regularization

Fatigue


- Pseudo-grain based fatigue model specifically for short fiber reinforced plastics
- Matrix damage based fatigue model for unidirectional composites

Loading


- Monotonic, cyclic or user-defined history loading
- Multi-axial stress or strain, General 2D & 3D, Harmonic
- Mechanical and thermo-mechanical
- Prediction of thermal & electrical conductivities

Further functionalities:

- Prediction of orthotropic engineering constants
- User defined outputs
- Interoperability with Digimat-FE and Digimat-MX
- Handling of encrypted material files

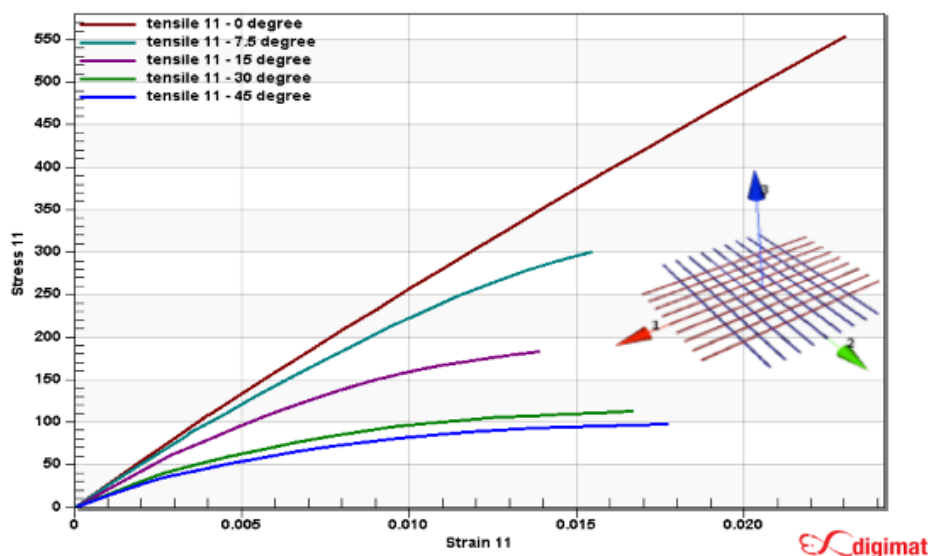

Stiffness & failure of thermoplastics based woven composites dependent of the fiber orientation



FE

Digimat-FE


Digimat-FE is the tool used at a microscopic level in order to gain an in-depth view into the composite material by the direct investigation of Representative Volume Elements (RVEs). Digimat-FE acts as a stochastic generator of highly realistic RVEs covering a large variety of materials: plastics, rubbers, metals, ceramics, nano-filled materials.

Based on material input and the microstructure definition, a finite element model is built and submitted to analysis. The results of the FE analysis are post-processed by using probabilistic distribution functions that give detailed insight into the RVE. Mean homogenized values are computed and can be used in subsequent FE analysis on the structural part level.

End-to-end solution

A complete end-to-end solution has been implemented in Digimat. It allows performing all the different steps needed to obtain a complete FE analysis - starting from the material data. For instance, the steps followed to model woven composites are:

- Extraction of the material data from the datasheet
- Mean-field homogenization of the yarns
- Generation of a geometry of a unit cell
- Generation of a RVE
- Voxelisation
- FE model definition and application of periodic boundary conditions
- Solving the FE analysis
- Post-processing the outputs of the FE analysis

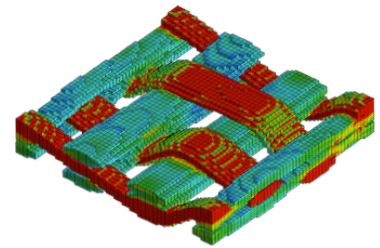

Voxel based solution for a woven 2.5D composite material computed in Digimat-FE

Latest Capabilities

- New microstructures
 - Foams: open and closed cells (random or periodic)
 - User defined failure indicator
 - Custom weave pattern for woven 3D

Main Capabilities

- Definition of composite constituents
- Inclusion shapes (Spheroid, Platelet, Ellipsoid, Cylinder, Curvy fibers, User defined, etc.)
- Material models (Elastic, (Thermo) Elastic, (Thermo) Elastoplastic, Viscoelastic, etc.)
- Inter-operability with Digimat-MF and Digimat-MX

Microstructure Definition

- Predefined phase types: matrix, inclusion, continuous fiber, void, yarn, strand, grain
- Microstructure morphology definition: Volume /Mass fraction
- Multiple inclusion shapes
- General orientation definition (fixed, random, 2nd order orientation tensor)
- Fiber length with access to size distribution
- Coating
- Inclusion / Matrix debonding
- Multi-layer microstructure
- Predefined microstructures: generic, fabrics, lattices, foams

RVE Generation

- RVE microstructure generation with real-time preview & animation process
- Maximum packing algorithm
- 3D & 2D RVEs

FE Meshing

- Voxel and conforming internal mesher available for
 - FE/Solver
 - Abaqus/Standard
 - Ansys
 - LS-Dyna
- RVE meshing embedded beam elements, straight or curved

RVE Analysis


- Monotonic / Cyclic / User-defined history loadings
- Multi-axial stress or strain, General 2D & 3D
- Mechanical and thermo-mechanical
- Computation of the percolation threshold
- Prediction of thermal and electrical conductivities
- Loading definition from structural FEA, i.e. Abaqus ODB file, Marc t16 file
- Export of RVE geometry in common formats: STEP, IGES, BREP

Embedded solver

- Digimat-FE solver for end-to-end solution
- FE analysis can be started & monitored from within Digimat-FE

Post-Processing

- Field visualization of results over RVE
- Computation & visualization of resultant distributions over RVE
- Computation of representative (mean) properties

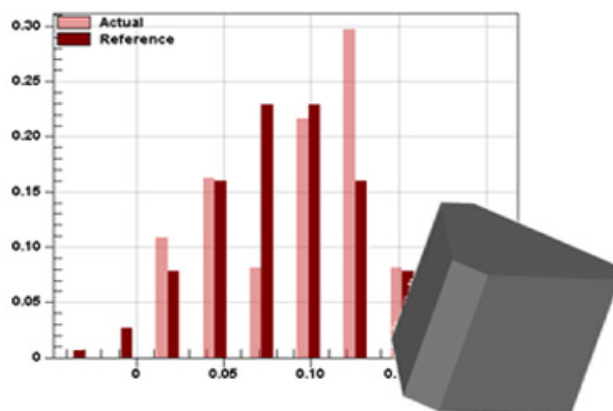

Generation of complex RVE based on geometric shape & size distribution



Digmat-MX

Digmat-MX is an eXchange tool that allows the user to reverse engineer, store, retrieve and securely share micromechanical models between material experts and designers of composite parts.

Digmat-MX tool stores anisotropic measurements and related micromechanical models. Embedded parameterization tools allow you to adapt the material performance to experimental data. Resulting Digmat models can be shared within large communities of different users.

Intellectual property is assured by built-in encryption technology.


Digmat-MX comes along with:

Public Data:

- Ready-to-run Digmat material models
- Experimental data as a base for building Digmat material models

Database setup & tools:

- Flexible user/group scenarios
- Data import & reverse engineering of Digmat material models
- Encryption technology for secured sharing

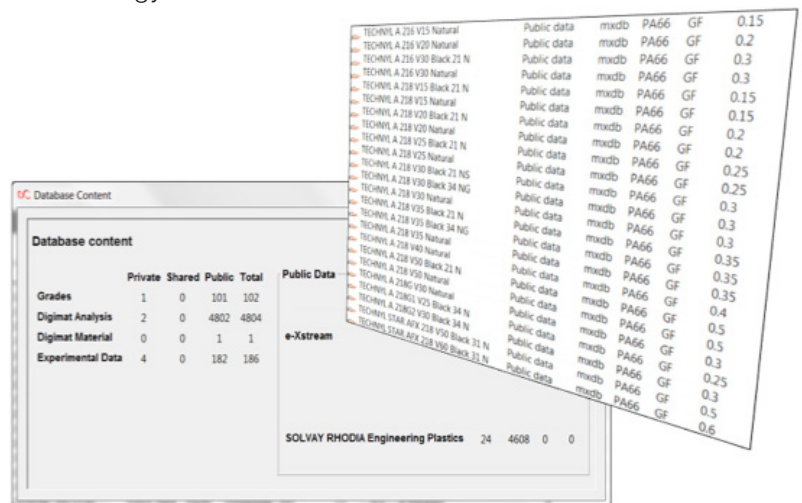

Public data for Short fiber reinforced plastics and UD & woven composites

Latest capabilities

- Enhanced SFRP fatigue reverse engineering
 - Support of failure multilayer trigger
 - Support of any loading angle
 - Stress localization factor computation
 - Public Database new content: Ahasi Kasei, Borealis, DSM, Dupont, Kuraray, Sabic, Solvay Engineering Plastics, Solvay Specialty Polymers, Stratasys Inc., Sumika Polymer Compounds

Main capabilities

Material database

- Public data:
 - From material suppliers: AGATE, Asahi Ka- sei, Borealis, Dupont, DSM, EMS-GRIVORY, EVON- IK, Kuraray, Lanxess, LyonDellBasell, NCAMP, Radici, SABIC, Solvay EP, Solvay SP, Stratasys Inc, Sumitomo, Sumika Polymer Compounds Celanese ,Trinseo, Victrex
 - From e-Xstream: generic grade (chopped fiber and continuous fiber)
- Gives access to:
 - Experimental data (tensile)
 - Digmat material / analysis files for homogeneous / composite materials: chopped fibers (short, long), continuous fibers(woven, unidirectional)
- Data available under various conditions:
 - Temperature, relative humidity, strain rates & loading angles
- Import, Filter & Reverse Engineering tools

Parametric identification

- Identify material model parameters based on the homogeneous material responses
 - Can be done on one or several curves at the same time

Encryption

- Material files can be encrypted for confidentiality purposes (available in MX+)
- Encrypted files can be used in Digimat-MF and Digimat-CAE, the material parameters being hidden
- Encrypted material files can be attributed an expiration date (available in MX+)


Additional Digimat-MX tools

- Data sheet generation of Digimat material models, as well as of experimental files, in pdf format.
- Database summary


Reverse Engineering

Two methods are available: automatic for easy and efficient reverse engineering, and interactive for expert reverse engineering.

- Automatic reverse engineering
 - Available for SFRP (glass fiber)
 - Linear elasticity, J2-plasticity, FPGF failure
 - Requires at least 2 stress-strain curves
 - Available for CFRP (glass and carbon fiber)
 - Linear elasticity, PFA
 - Requires basic datasheet information
- Interactive reverse engineering
 - Various loading angles, strain rates and / or temperatures
 - At homogeneous and macroscopic level
 - Material models that can be reverse engineered:
 - (Thermo) Elastic
 - Viscoelastic
 - (Thermo) Elastoplastic
 - (Thermo) Elasto-viscoplastic
 - Viscoelastic-viscoplastic
 - Failure indicators that can be reverse engineered:
 - Maximum stress, maximum strain
 - Tsai-Hill 2D, Tsai-Hill 2D in strain
 - Tsai-Wu 2D, Tsai-Wu 2D in strain
 - Hashin Rotem 2D
 - Hashin 2D
 - Tsai-Hill 3D transversely isotropic
 - Tsai-Wu 3D transversely isotropic
 - SFRP pseudo-grain fatigue
 - Other features that can be reverse engineered:
 - Aspect ratio of inclusion phase
- Multi-layer microstructures are supported

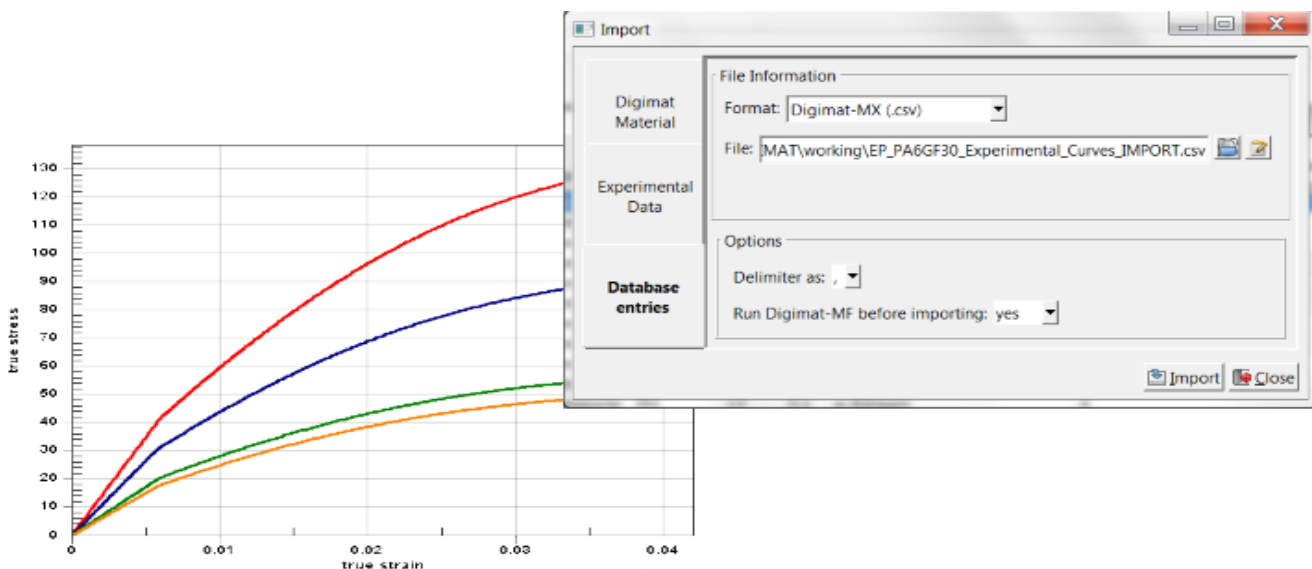

User friendly & save storage of anisotropic material measurements



MAP

Digmat-MAP

Digmat-MAP is a highly efficient mapping software used to transfer data between dissimilar meshes.

A rich set of embedded tools allows full control over the required workflows:

- Manipulation of meshes
 - Measurement of positions, distances, and angles
 - Manual superposition
 - Automated superposition
- Transfer of data
 - Fiber orientation, volume fraction & aspect ratio
 - Temperature
 - Residual stresses
 - Location of weld lines
- Quality Assessment
 - Global & local error analysis
- Visualization & Post-Processing
 - Display of mapped microstructure (scalar, tensor vector & ellipsoidal plot)
 - Investigation of local stiffness


Latest Capabilities

- Extended molding data support
 - Cadmould
- Support of porosity data from Volume Graphics (diffuse and macroscopic porosities)

Main Capabilities

Data Types Managed

- Fiber orientation: Orientation tensor / Woven (warp / weft)
- Fiber length: Aspect ratio
- Volume fraction: Fibers / Voids
- Residual stresses
- Temperatures
- Weld Lines
- Thickness
- Warpage
- Toolpath Element sets

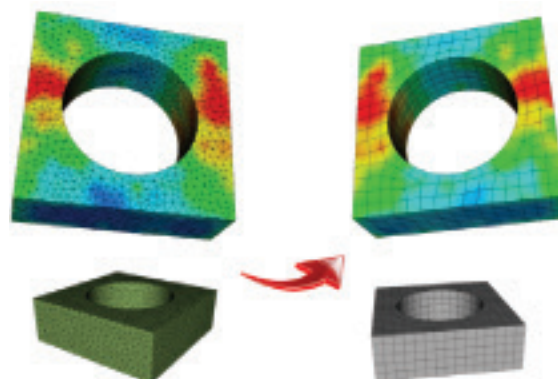

Mapping of data between dissimilar meshes

Element types

- Donor
 - Tetrahedron or triangular shell elements
 - Hexahedron and wedge elements
- Receiver
 - Tetrahedron or triangular shell elements
 - Hexahedron or quadrangular shell elements
 - Wedge elements

Shell & 3D Mapping

- From midplane to multi-layered shell
- Between Continuum 3D elements
- Across the shell thickness
- 3D to shell mapping

Data Post-Processing


- Contour or vector plots
- Display tensorial fields using ellipsoids
- Synchronized display of donor and receiving meshes
- Through-the-thickness orientation or temperature plot for shell elements
- Cut plane on 3D meshes
- Superposition display of the donor with the receiving meshes

Error Indicators

- Global & local error indicators to validate mapping quality

Donor-Receiver Positioning

- Scaling, Translation, Rotation, Superposition

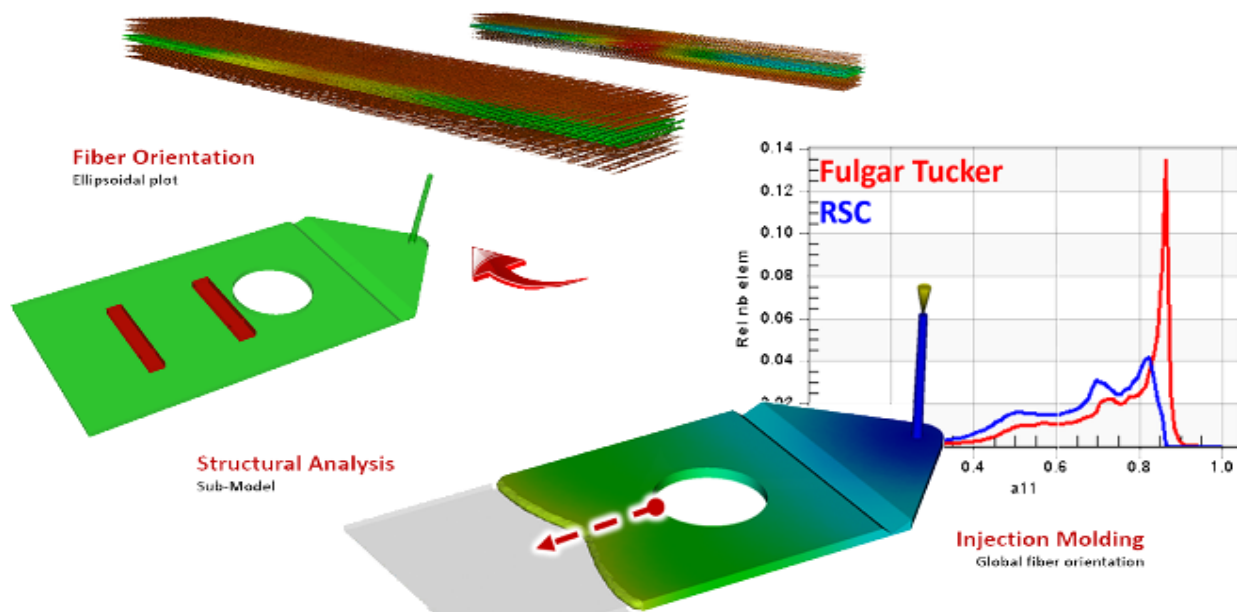

Local visualization and global analysis of fiber orientation data after mapping



Digmat-CAE

Digmat-CAE centralizes the upstream and downstream interfaces for Digmat material models and bridges the gap between processing and final composite part performance.

It is the central tool used for building coupled multi-scale analyses based on the manufacturing process. Local microstructure is taken into account and translated into a macroscopic material response. This results in a highly accurate prediction of the final performance of the composite part.

Digmat-CAE offers GUI guidance for the set-up of integrative simulations and supports this approach via embedded Plug-Ins in native FEA environments. Choices of Digmat multi-scale solution methods (MACRO/MICRO/HYBRID) allows the individual to balance the need for accuracy and fast computation.

Latest Capabilities

- Improved accuracy with Hybrid solution for accumulated plastic strain failure indicator
- CAE interface maintenance
 - Abaqus: 6.14-1, 2016, 2017, 2018
 - ANSYS: 18.2, 19.0, 19.1, 19.2
 - LS-DYNA: 9.1, 9.2, 9.3
 - Marc: 2017.1, 2018
 - Nastran SOL1XX: 2016 or older
 - Optistruct: V13, V14
 - PAM-CRASH: 2015, 2016, 2017, 2018
 - Samcef: V16, V17
 - nCode: 2018.1




Anisotropic multi-scale material modeling for accurate design simulations

Post-Processing

- Micro
 - Default & customized material output
 - Design output related to the fiber orientation
- Hybrid
 - Reduced number of material output
 - Design output related to the fiber orientation

Digmat-CAE/Structural

- FEA solver types:
 - Explicit
 - Implicit
- Micromechanical Material Model:
 - Linear
 - Nonlinear
 - Rate dependent
 - Thermo dependent
 - Finite strain
- Weak coupling
- Hybrid:
 - E, EP, EVP, TE, TEP, TEVP, VE, VEVP material
 - Standard per phase failure and FPGF at the composite level - except for TE/TEP
 - Short fiber, UD, Woven
- Strong coupling interfaces to FEA:
 - Abaqus Standard & Explicit
 - ANSYS Mechanical
 - LS-DYNA, Implicit & Explicit
 - Marc
 - Nastran SOL400
 - PAM-CRASH
 - SAMCEF (Mecano / Dynam)

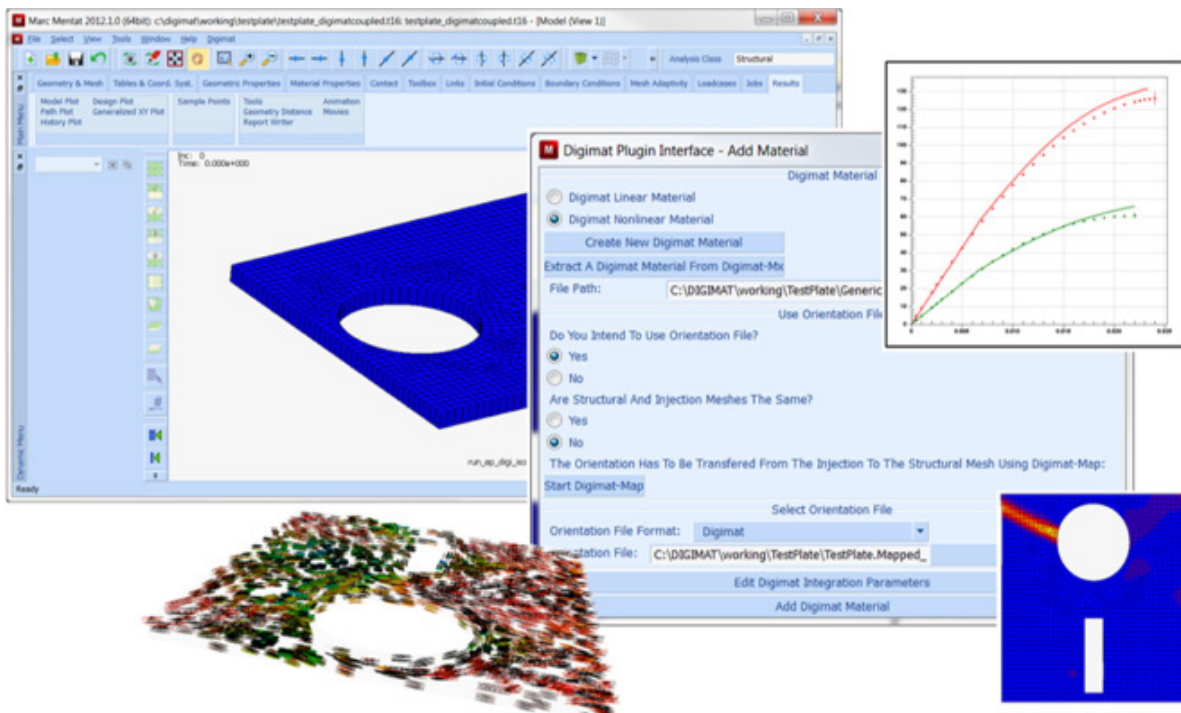

User-friendly Digimat plug-ins into native CAE environments



Digmat-RP

Digmat-RP is a solution for the virtual design of injection molded fiber reinforced plastic parts.

Lightweight engineering re-designs metal parts into fiber reinforced plastics produced by injection molding. For reinforced plastics manufacturing procedures influence the material microstructure. The effect of local fiber orientation leads to a distribution of material properties over the part. This can drastically influence its final performance and must be taken into account in the design procedures.


Multi-scale simulations read local fiber orientations from injection molding simulations and feed them into a micromechanical material model. The distribution of local properties is taken into account in the computation of the final performance of the part.

Digmat-RP allows to:

- Load finite element analyses of a broad range of different solvers
- Assign a micromechanical material model to a specific part
- Choose a robust & fast multi-scale simulation method for a coupled analysis
- Map local microstructure information onto the part
- Estimate microstructure if no manufacturing data is available yet
- Launch & monitor the coupled analysis
- Access the results of the multi-scale simulation

Latest Capabilities

- New fatigue post-processing environment
- Extended microstructure estimation
 - 3D mesh: weld line location
 - New 2D mesh support for fiber orientation estimation
- Support of fiber reinforced FFF/FDM materials

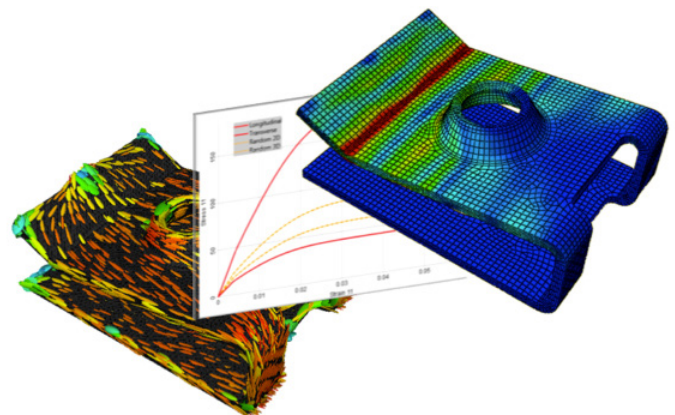


Bridging the gap between injection molding and structural simulations


Main Capabilities

- Easy setup of 3D & shell coupled analyses
- Processing
- Microstructure estimation with Digimat-RP/Moldex3D add-on
- Injection / Injection-Compression / Compression molding Software / Additive Manufacturing
 - Moldflow
 - Moldex3D
 - Sigmasoft
 - 3DTimon
 - REM3D
 - SIMPOE
 - Digimat-AM
 - Insight
- Material
 - 2-phase materials
 - Short & long fiber reinforced polymers (Molding), Unfilled & reinforced polymers (Additive manufacturing)
 - Input
 - Generic
 - From Digimat-MX (Support of encryption)
 - From Digimat-MF (From File (.daf & .mat))

- FEM solvers
 - Marc
 - MSC Nastran (SOL 1XX, SOL400 and SOL700)
 - Abaqus (Standard & Explicit)
 - Ansys
 - LS-Dyna (Implicit & Explicit)
 - Optistruct
 - PERMAS
 - Samcef
 - Pam-Crash
- Solution methods:
 - Macro, Micro, Hybrid, Linear
 - User defined templates
- Job management
 - Submission
 - Monitoring

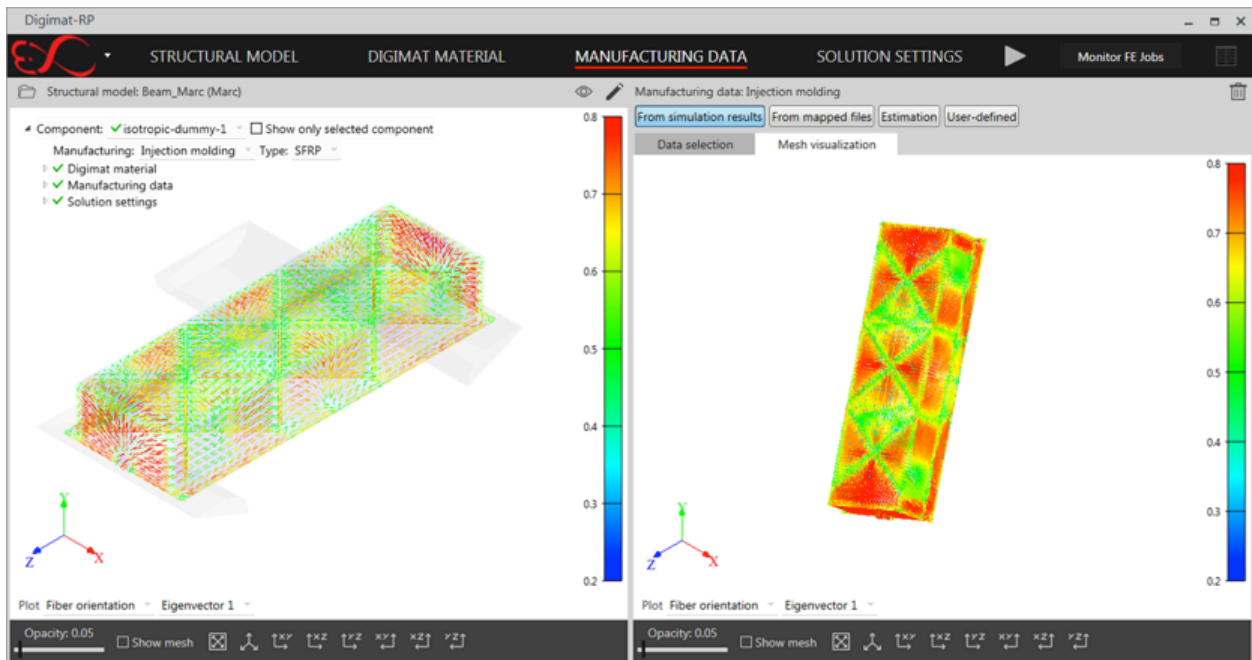

User-friendly setup of multi-scale analyses in Digimat-RP



HC

Digmat-HC

Digmat-HC is the solution for the virtual design of honeycomb composite sandwich panels.

The performance of composite sandwich panels depends on the properties of the skin and the core. These are determined by the choice of the underlying microstructure. The core is sensitive to the structure of the constituting honeycomb. The composite skins performance is dependent on the selected fiber type and stacking orientation of the layers. Design choices are typically investigated in bending and shear tests.

The virtual design of a composite sandwich panel requires a multi-scale modeling strategy to be able to map the effect of the microstructure onto the macroscopic performance of the panel. In a coupled analysis the full setup of the panel can be varied and the impact on the final performance under bending and shear investigated in an easy & efficient way.

Digmat-HC allows the user to:


- Set up the structure of a composite sandwich panel
- Define the properties of the core (honeycomb & foam)
- Define the properties of the skins (UD, woven, & chopped fibers)
- Investigate the panel design under different scenarios (3-/4-point-bending & shear)
- Flexible access to the results of the analysis (field plot & through-thickness path analysis)

Main capabilities

Skin Definition

- Pile up:
 - Symmetric
 - Anti-symmetric
- Material properties:
 - Orthotropic elastic properties of the ply
 - Ply orientation
- Resin/Fibers:
 - Isotropic elastic properties of the resin and fibers
 - Fiber weight fraction, length and orientation

The equivalent, homogenous, properties of the skins are computed using micromechanics.

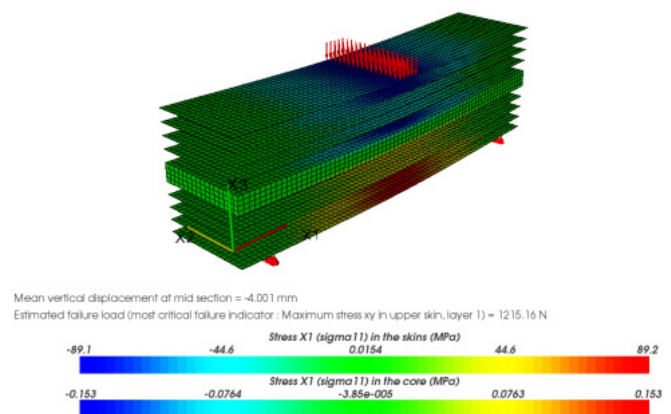

Stress response of a composite sandwich panel exposed to three-point bending

FEA Model

- Automatic mesh generation following selected mesh refinement:
 - Coarse
 - Average
 - Fine
- Loading:
 - Three-point bending
 - Four-point bending
 - In-plane shear

Customized positions and amplitudes for loading points and fixations.

Core Definition

- Honeycomb: honeycomb properties are computed using micromechanical models based on the cell geometry and the bulk properties
- Foam

Post-processing

Integrated post-processing including 3D and through-thickness views of stresses, strains and failure indicators.


Failure Indicators

- Core:
 - Maximum stress (compressive, shear)
- Skin:
 - Maximum stress
 - Tsai-Wu
 - Tsai-Hill
 - Azzi-Tsai-Hill


Automatic Report Generation (html)

Automatic Generation and Solving of the FEA

Model using a Built-in FEA Solver

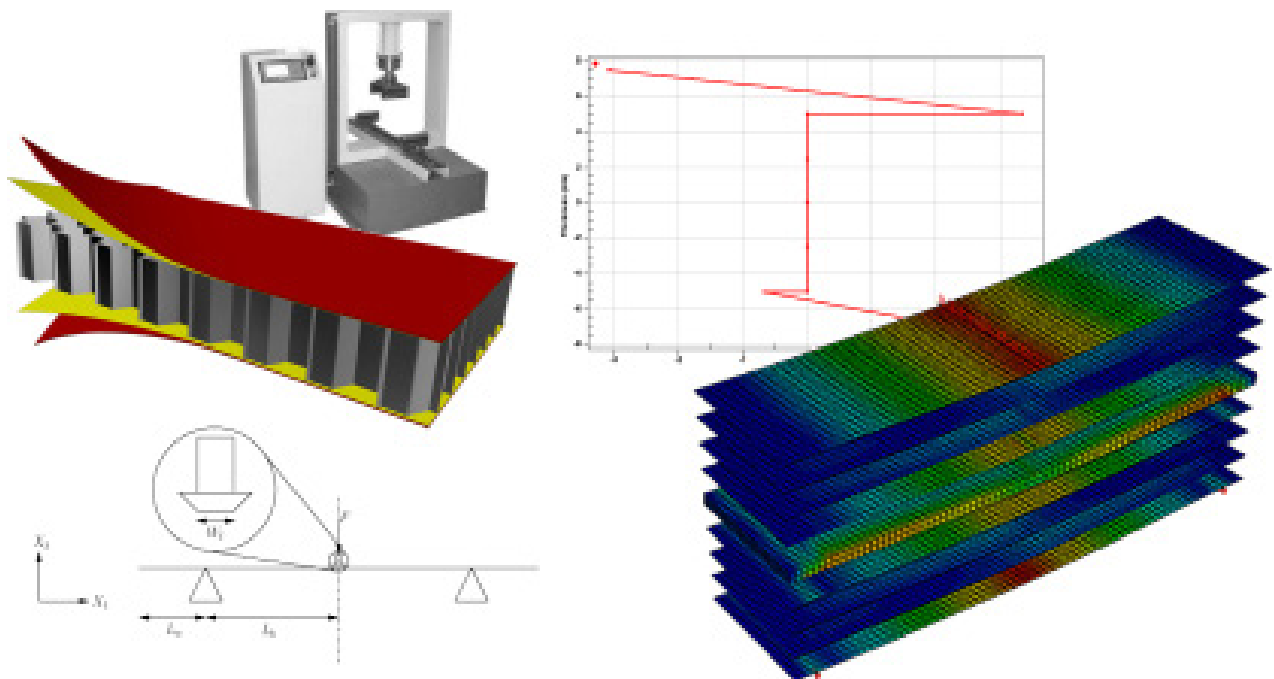

Digmat-HC – Virtual test environment for composite sandwich panels



Digmat-VA



Digmat-VA (“Virtual Allowables”) is an efficient solution that empowers engineers to virtually compare materials before going into the lengthy physical allowables. By generating virtual allowables, engineers can now start the component design in parallel to the physical allowable campaign.

Digmat-VA is a vertical solution is developed to compute, instead of test, the behavior of composite coupons (unnotched, open hole, filled hole, etc.) to screen, select and compute the allowables of composite materials.

Digmat-VA...

- It defines test matrix in a few clicks
- It creates multiscale material models based on composite datasheet
- It models batch and process variability
- It can go beyond recommended CMH17 procedures
- It turns a test matrix into FEA runs to obtain virtual allowables

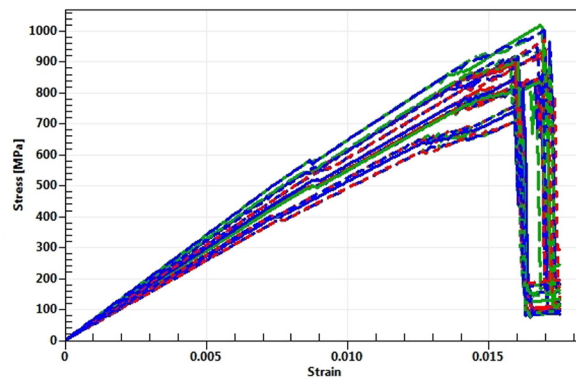


Figure 1: Stress-strain curves extracted from coupon simulations including variability

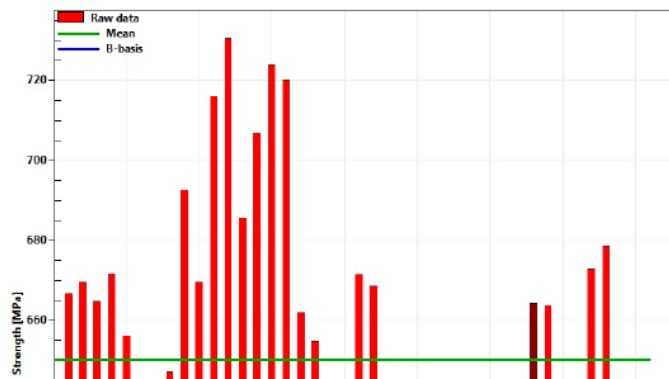


Figure 2: A and B-basis are computed from the raw strengths results

Main Capabilities

- Prediction of allowables
 - UD, woven materials
 - Unnotched tension/compression, open-hole tension/compression tests, filled hole tension/compression and bearing tests
- Test matrix preparation
 - Definition of materials, layups, tests, environment condition
 - Definition of variability (none, random draw, parametric study)
- Simulation preparation
 - Import of Digimat model including progressive failure
 - Setup of user defined material model if needed
 - Calibration of Digimat model from data sheet (progressive failure or first ply failure)
 - Definition of micro-level variability
 - Gaussian distributions
 - Definition of FEA settings
 - Mesh size, element type, meshing strategy, number of timesteps
- Simulation run
 - Embedded solver for local run
 - Remote job submission for large simulation test matrix
 - Job management
- Job prioritization
- Monitoring
- Post-processing
 - Automatic extraction of stress-strain curve, stiffness and strength
 - Computation of A, B-basis and mean values for strength following CMH17 procedures
 - Strength and stiffness distribution plots
 - Visualization of stress, strain and damage fields on coupon model, failure mode
 - Creation of a customized report
 - Export of raw results to Excel
 - Export of raw results to MaterialCenter
- Additional functionalities
 - Save Digimat-VA project
 - light or complete
 - Management of working database
 - materials, layups, tests, conditions and FEA settings

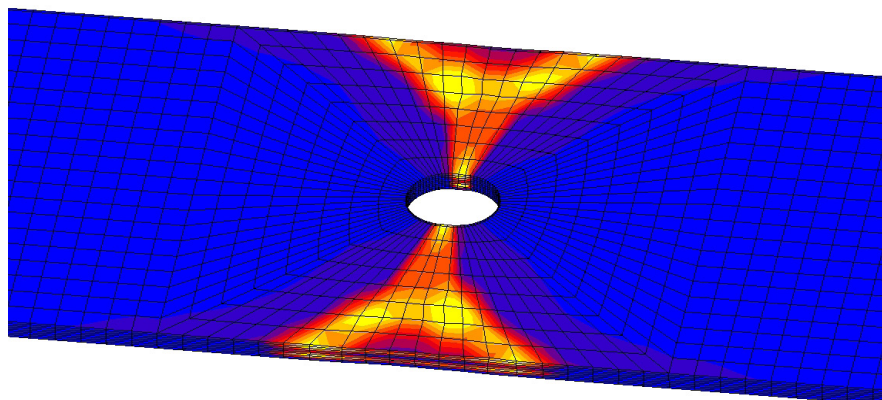


Figure 3: Visualization of fiber damage in an open-hole tension specimen



Digmat-AM



Digmat-AM is a process simulation solution dedicated to the Additive Manufacturing of polymer parts. It predicts the as-printed part warpage and residual stresses accounting for the process characteristics and material behaviors.

Digmat-AM provides engineers with a process simulation solution that helps:

- Minimize warpage and control shape
- Minimize part-to-part variability
- Set up the right manufacturing parameters for high precision printing


and further bridges the gap between printing process, material and part performances.

Main Capabilities

- Supported AM processes:
 - Selective Laser Sintering (SLS)
 - Fused Filament Fabrication (FFF) or Fused Deposition Modeling (FDM)
- Simulation setup
 - Select printer or define printer characteristics (Stratasys Fortus 900mc available)
 - Load part geometry (STL format)
 - Position the part in the printer chamber
 - Load and visualize toolpath (GCode file format when targeting FDM/FFF, Insight file when targeting FDM)
 - Import material model from Digmat-MX database (or create a generic one)
 - Support unfilled and reinforced materials (beads and fibers reinforcements)
 - Voxelize part geometry
 - Map the local printing directions to the voxel mesh
- Finite element analysis
 - Embedded non-linear solver (standalone solution)
 - Thermo-mechanical simulations
 - Job management and monitoring
- Post-processing
 - Prediction of warpage and residual stresses
 - Field visualization (stresses, displacements)
 - Warpage visualization
 - Export results and voxel mesh
 - Export deformed STL file
- Project management
 - Load/Save Digmat-AM project

Digmat-AM workflow reproduces the real printing process:

- Choose the printing technology (SLS or FDM/FFF)
- Select the printer from a dedicated database with predefined parameters, or specify user-defined parameters
- Load the part geometry in STL format
- Load the slicing or toolpath definition
- Select the material grade (reinforced or unfilled polymer) and the associated material model from Digmat-MX database
- Create the voxel mesh of the part
- Solve the thermo-mechanical finite element analysis simulating the printing process
- Post-process and export the results of the process simulation (stress/strain fields, warped part shape, etc.)
- Optimize the process parameters

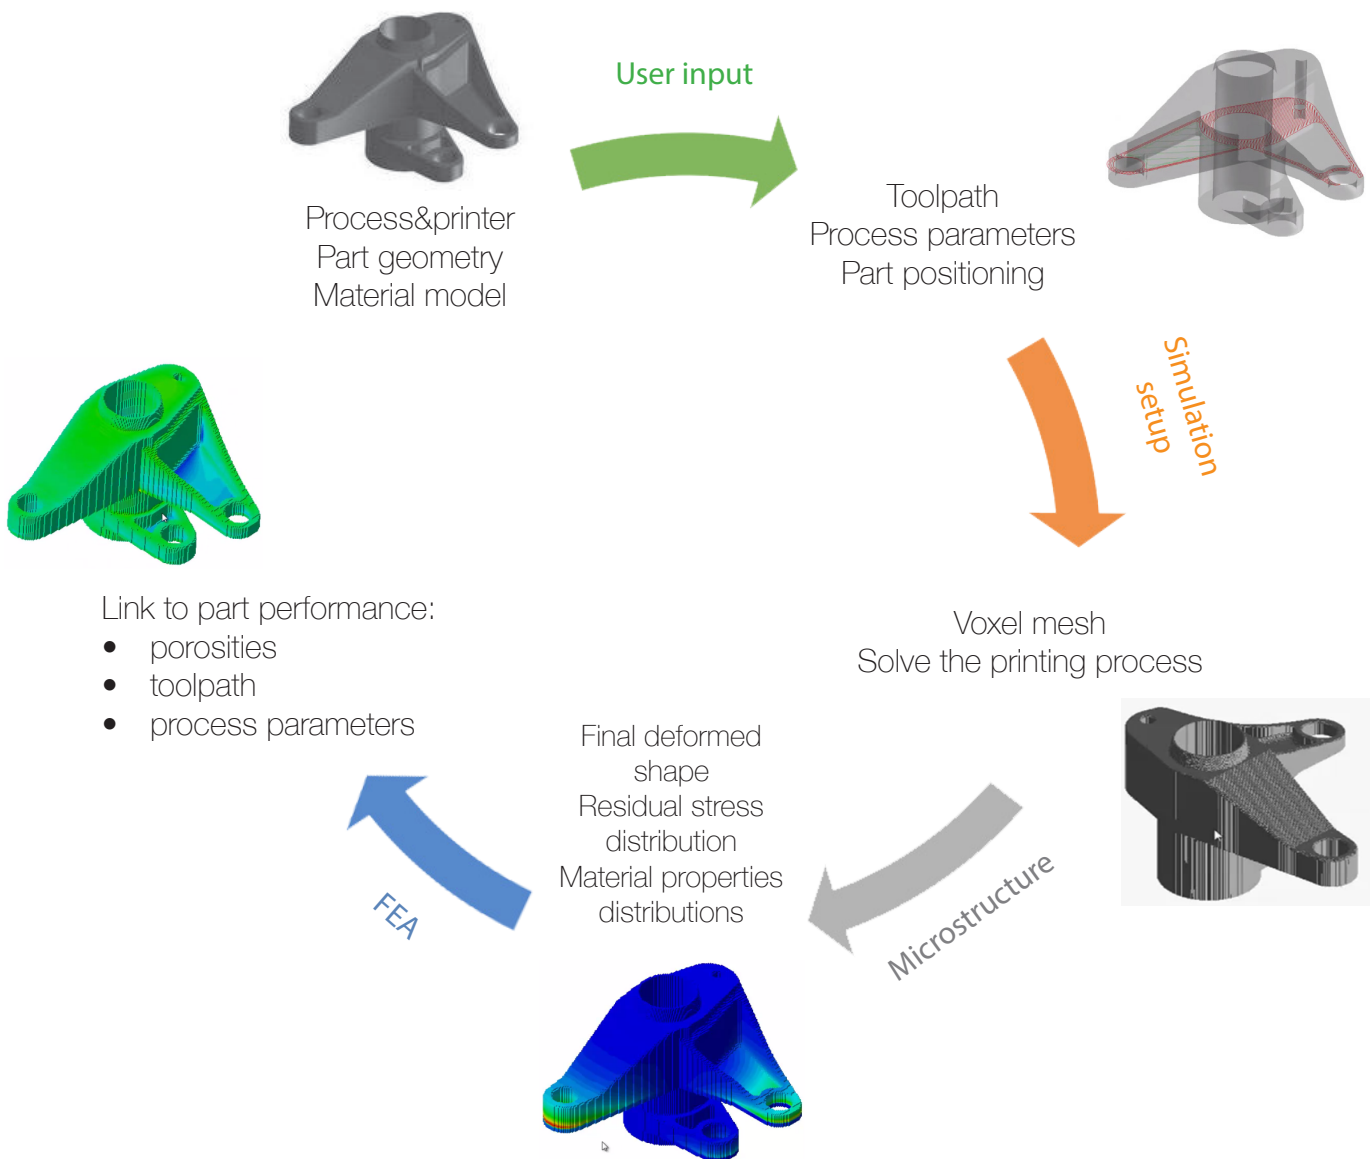

Trainings

e-Xstream engineering provides a complete training service with the Digimat software package. The aim is to unlock the full power of the Digimat software with trainings created and led by product experts.

Digimat trainings are organized regularly in Europe, the USA, and Asia. The training offer includes Beginner and Advanced levels targeting the topics of Material Engineering (focus on Digimat-MF, Digimat-FE and Digimat-MX), Virtual Testing (focus on Digimat-VA, Digimat-MF and Digimat-FE) , Structural Engineering (focus on Digimat-RP, Digimat-MAP, Digimat-CAE and Digimat-MX, etc.) and Process Simulation (focus on Digimat-AM).

These training courses are a combination of presentations and live product demos followed by practical hands-on sessions. They aim at answering the users' questions and also include the best practices on how to use Digimat new capabilities.

e-Xstream engineering also offers customized trainings, 100% tailored to the customers' specific needs and organized at the customer premises. These trainings are a combination of theory and product presentation followed by an assisted hands-on session. Besides general training and technology transfer the aim is to directly set-up customer specific models.

Contact our Training Services team at digimat.support@mscsoftware.com.



Engage. Solve. Deliver.

Engineering Services

The pressure for achieving major weight reductions has been around for a few years and keeps increasing. A solution to most industries consists in innovating on the use of composites in applications known to be restricted to other materials such as metals. For other industries, composites are already used extensively but a lack of control on their exact properties limit users' ability to optimize designs and develop new composite solutions. Virtual prototyping is absolutely necessary to efficiently drive, with confidence, those types of engineering innovations; it serves at fully understanding and mastering both the processing of composite parts as well as their end performances.

Thanks to the Digimat technology that plays a key role in accurately modeling composite materials and parts in the virtual prototyping phase, the product development process is accelerated and products design is optimized. But having access to the right products isn't always sufficient; it is important to understand when and how to use it, as well as to render it user-friendly via the elaboration of clear and straightforward procedures helping anyone in the company to use Digimat in its daily life.

With more than 15 years of experience in the field of composites modeling, e-Xstream is composed of an extremely skilled engineering team with broad knowledge and expertise in various types of engineering disciplines across all industries.

Areas of eXpertise :

Process simulation: Injection and compression molding, drape molding, RTM, etc.

Structural simulation: Static, Dynamic (impact & crash), Modal, Fatigue, Creep, etc.

Various industries: Aerospace, Automotive, Consumer Electronics, Material Suppliers, etc.

Various CAE softwares: MSC software, Abaqus, Altair, ANSYS, Autodesk Moldflow, LS-Dyna, PAM-CRASH, RADIOSS and SAMCEF.

Thanks to this outstanding team, e-Xstream is proud to offer consulting support, for any type of composite engineering work, based on your specific needs and requirements. This could range from performing analysis for you on a project basis; one or two times a year, or providing full time staff members to help you create repeatable processes in-house.

The Engineering Services team works closely with customers to support their specific needs in getting more accurate predictions of the micro-mechanical behavior of composite materials and parts.

Contact our Engineering Services team at engineering.services@e-Xstream.com



www.e-Xstream.com
info@e-Xstream.com

© 2019 MSC Software Belgium SA. All rights reserved.

The e-Xstream and eXdigimat logos, e-Xstream engineering, eX, eXdigimat and Digimat are trademarks or registered trademarks of MSC Software Belgium SA. All other trademarks belong to their respective owners.

e-Xstream engineering is a division of MSC Software Belgium SA.

MSC software Belgium SA is part of Hexagon (Nasdaq Stockholm: HEXA B; hexagon.com), a leading global provider of information technology solutions that drive productivity and quality across geospatial and industrial landscapes.